



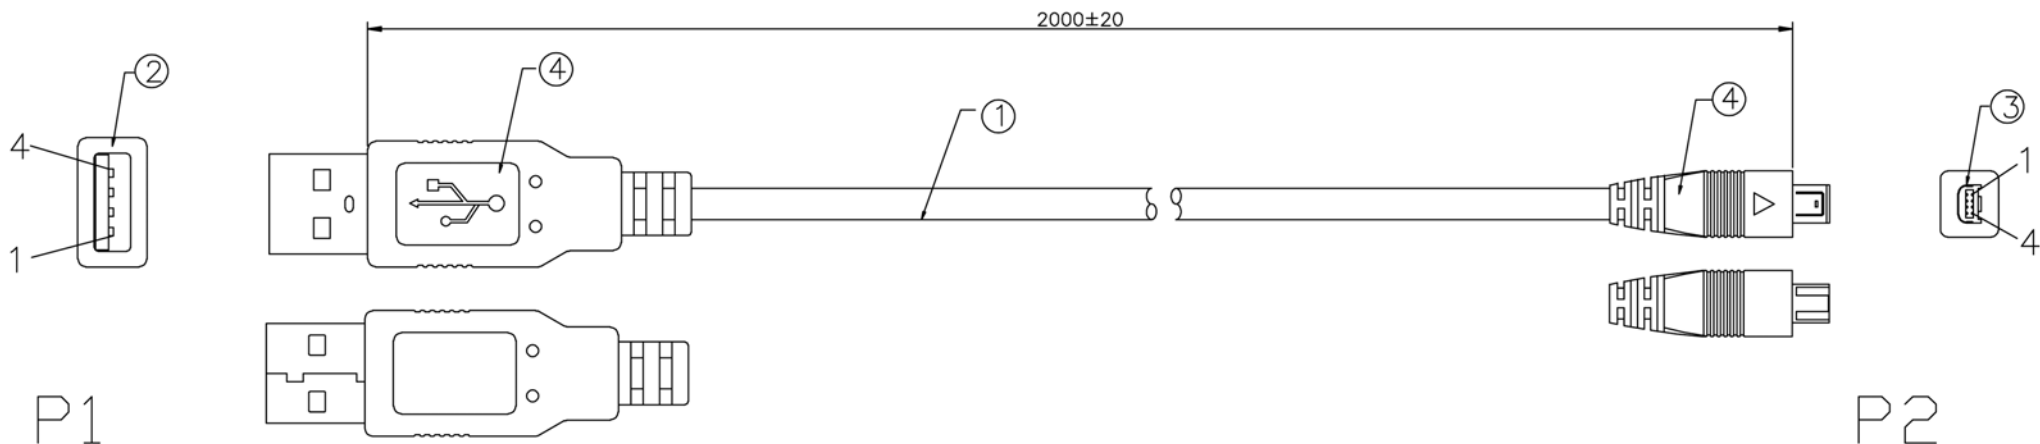

PIN OUT

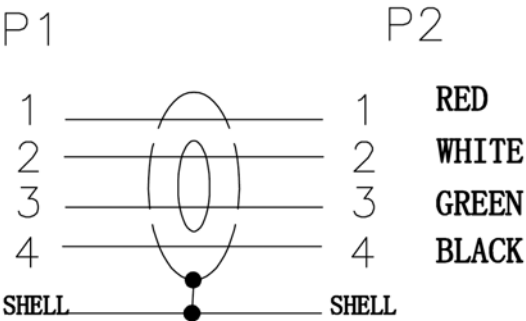

REQUIREMENTS:

- 1:100% short and open testing.
- 2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

④	MOLDED	BLACK 45P PVC	0.028	KG
③	CONNECTOR	MINI USB 4PIN MALE	1	PCS
②	CONNECTOR	USB A TYPE MALE	1	PCS
①	CABLE	UL2725 28AWG*1P+28AWG*2C+AL+D+B OD:3.8MM,BLACK JACKET	4.5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		MARCH 4.2012	USB A/M-MINI 4P L=2M	MARCH 4.2012	FREE	
				26-2816		
				26-2816	Edition 1	Sheet 1/2